



▶ **SX TYPE**

- ATS SMD type package
- AT or BT cut available
- Resistance weld seal
- Tape and reel available
- Tight tolerance / stability

■ **ELECTRICAL SPECIFICATIONS**

MODEL	SX-1, SX-3, SX-5
Frequency Range	3.579 to 85.000MHz
Operating Temperature Range	-10 to +60°C(STD), -20 to +70°C
Storage Temperature Range	-40 to +85°C
Frequency Tolerance (at 25	±15, ±30, ±50 ppm(STD)
Frequency Stability Over Operating Temperature Range	±30, ±50, ±100 ppm(STD)
Load Capacitance (CL)	18pF(STD), Custom CL≥10pF or Series Resonant
Drive Level	0.01 to 1,000μW
Shunt Capacitance (Co)	7pF Max
Aging (at 25	5ppm / year Max
Insulation Resistance	500 MΩ Min at 100VDC


Frequency Range (MHz)	ESR (ΩMax)	Mode of Oscillation
3.579 ~ 3.999	150	Fundamental / AT
4.000 ~ 4.999	120	Fundamental / AT
5.000 ~ 5.999	100	Fundamental / AT
6.000 ~ 7.999	90	Fundamental / AT
8.000 ~ 9.999	70	Fundamental / AT
10.000 ~ 11.999	60	Fundamental / AT
12.000 ~ 14.999	50	Fundamental / AT
15.000 ~ 19.999	40	Fundamental / AT
20.000 ~ 27.000	30	Fundamental / AT
27.000 ~ 32.999	50	Fundamental / BT
33.000 ~ 40.000	40	Fundamental / BT
24.576 ~ 47.999	80	3rd Overtone
48.000 ~ 85.000	60	3rd Overtone

■ **MECHANICAL DIMENSIONS**


Please refer to next page.

MECHANICAL DIMENSIONS

► SX - 1

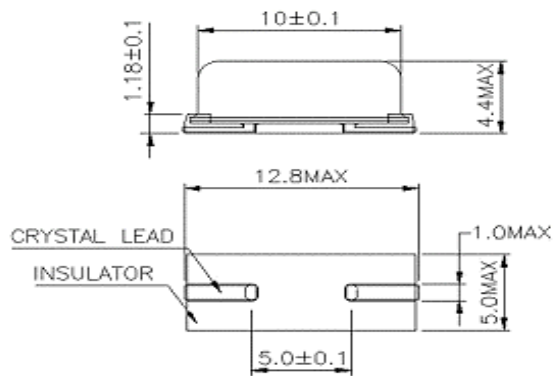


LAND PATTERN




MECHANICAL DIMENSIONS

► SX - 3

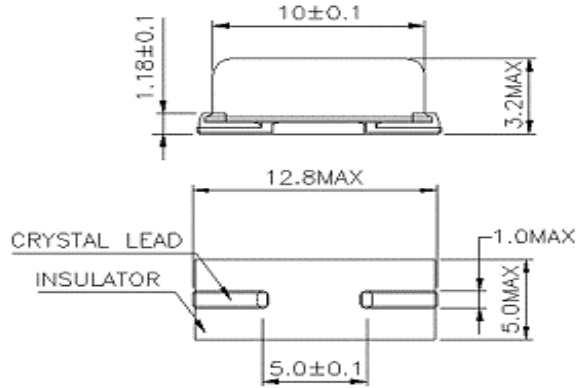


LAND PATTERN



MECHANICAL DIMENSIONS

► SX - 5

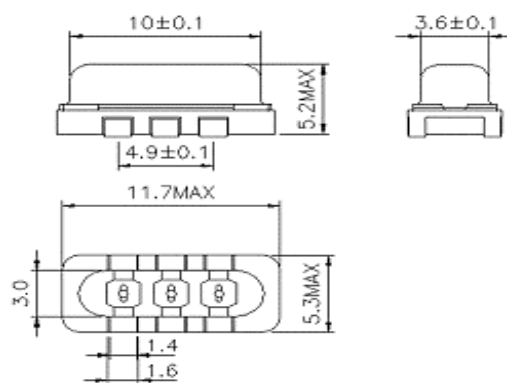

LAND PATTERN

