

ORGANIC SEMICONDUCTOR SOLID ELECTROLYTIC CAPACITORS

UPGRADE



Lead type, High CV
Series

- Large capacitance and low ESR compared with FX series
- High CV value
- Suitable for high frequency switching power supplies, computer, audio equipment etc.

APRO-CAP




Item	Characteristics	
Operating temperature range	-55 ~ +105 °C	
Leakage current max.	Not more than the values in Table 1	
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C	
Dissipation factor max. (at 120Hz, 20°C)	Not more than the values in Table 1	
ESR	Not more than the values in Table 1	
Low temperature characteristics (Impedance ratio at 100kHz)	Z-55°C / Z+20°C 0.75 ~ 1.25	Z+105°C / Z+20°C 0.75 ~ 1.25
Load life* (after application of the rated voltage for 2000 hours at 105°C)	Leakage current Capacitance change $\tan\delta$	Less than specified value Within $\pm 20\%$ of initial value Less than 150% of specified value
Moisture resistance (after leaving capacitors under no load at 60°C for 1000 hours 90~95% R.H.)	Leakage current Capacitance change $\tan\delta$	Less than specified value Within $\pm 20\%$ of initial value Less than 200% of specified value

* Note: 1. To use an APRO-CAP when the operating temperature exceeds 85°C on a component with a rated voltage of 25V, reduce the voltage by 0.25V for every degree (1°C) relative to the value 85°C (25V).

2. If any doubt arises, measure the current after applying voltage (voltage treatment) for 30 minutes at 105°C.

The rated voltage should be applied for 6.3 to 20WV, while a temperature reduction voltage should be applied for 25WV.

● DRAWING (Unit : mm)

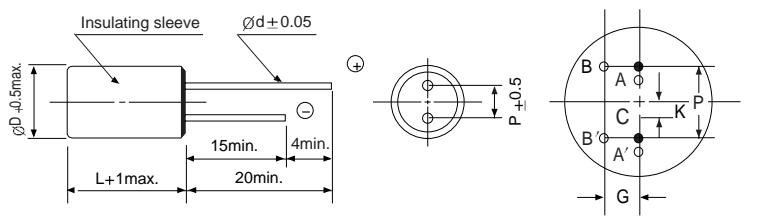

● PART NUMBER SYSTEM (See Page 50)

ØD × L	Code	P	Ød	K max.	G max.
6.3 × 9.8	6L09H	2.5 ± 0.5	0.5	0.5	0.5
8 × 10.5	0810M	3.5 ± 0.5	0.6	0.8	0.8
10 × 10.5	1010M	5.0 ± 0.5	0.6	0.8	0.8
10 × 20	10020	5.0 ± 0.5	0.8	0.8	0.8
12.5 × 22	12022	5.0 ± 1.0	0.8	0.8	0.8

C: The central point of A-A'

● DIMENSIONS

μF	WV	2	4	6.3	10	16	20	25
33								8×10.5
56								10×10.5
68							6.3×9.8	
100						6.3×9.8		
120							8×10.5	
150					6.3×9.8			
180						8×10.5	10×10.5	
220				8×10.5				
270			6.3×9.8		8×10.5	10×10.5		
470						10×10.5		
560			8×10.5					
680				10×10.5				
820			10×10.5					
1000		10×10.5						
1500			10×20					
1800		10×20						
2200			12.5×22					

FD Series

● Table1. FD Series Characteristics List

WV	uF	øD(mm)	L(mm)	ESR(mΩ)max. at 20°C 100~300kHz	Ripple current (mA rms)at 45°C 100kHz	Dissipation factor at 20°C 120Hz	Leakage Current (uA)(max.) after 2minutes
2	1000	10	10.5	11	5260	0.08	400
2	1800	10	20	8	6500	0.10	720
4	270	6.3	9.8	20	3160	0.08	108
4	560	8	10.5	14	4080	0.08	224
4	820	10	10.5	12	5040	0.08	328
4	1500	10	20	8	6500	0.10	600
4	2200	12.5	22	10	7100	0.12	880
6.3	220	8	10.5	30	3000	0.07	69.3
6.3	680	10	10.5	13	4840	0.08	428.4
10	150	6.3	9.8	25	2820	0.08	150
10	270	8	10.5	18	3600	0.08	270
10	470	10	10.5	15	4510	0.08	470
16	100	6.3	9.8	25	2820	0.08	160
16	180	8	10.5	20	3410	0.08	288
16	270	10	10.5	18	4400	0.08	432
20	68	6.3	9.8	30	2580	0.08	136
20	120	8	10.5	24	3110	0.08	240
20	180	10	10.5	20	4280	0.08	360
25	33	8	10.5	30	2780	0.08	82.5
25	56	10	10.5	25	3260	0.08	140